



## » INDUSTRY BULLETIN

# Cesa™ Non-PFAS Low Retention Additives Delivering Hydrophobic Performance in Polypropylene Without PFAS

As many countries tighten regulations around the use of per- and polyfluoroalkyl substances (PFAS), industries relying on hydrophobic materials—such as medical, laboratory, and personal care sectors—face a critical challenge: achieving high-performance water repellency without using fluorinated additives.

Our Cesa™ Non-PFAS Low Retention Additives can help address this challenge. Available as concentrates or pre-compounds in polypropylene (PP) resin, they deliver durable hydrophobicity with low extractables and excellent processability, making them useful for applications such as labware and pipette tips. These non-PFAS additives in a PP carrier can be tailored to fine-tune physical properties of the final parts, yield robust hydrophobicity in varied processing conditions, and provide a PP solution suitable for radiation sterilization.

### KEY CHARACTERISTICS

- Formulated without intentionally added fluorinated substances
- Free of slip agents, plasticizers, and biocides, avoiding those types of ingredients that may cause interference with protein or DNA assays
- Based on high-quality virgin PP resin suitable for labware applications
- Delivers high-performance repellency
- Achieves high water contact angles<sup>1</sup> contributing to durable hydrophobicity
- Delivers hydrophobic performance after long-term storage or heat aging<sup>2</sup>
- Demonstrates low leachability, critical for pipette tips and diagnostic devices
- Compatible with standard PP injection molding temperatures (210°C–250°C) with a wide range of injection fill speeds
- Withstands typical electron-beam and Gamma radiation sterilization doses with minimal yellowing and fast recovery of hydrophobicity post-radiation
- Achieves low optical haze and good clarity in molded parts
- Non-animal derived versions available

### REFERENCES

<sup>1</sup> <https://www.nanoscience.com/techniques/tensiometry/contact-angle-measurements-and-wettability/>


<sup>2</sup> <https://westpak.com/industry-solutions/medical-device/accelerated-aging/>

## PERFORMANCE PROPERTIES

PROPERTY	RESULT
Water Contact Angle (ASTM D5946)	~ 108°
Residual liquid in a low-retention test (green or blue dyed water is used as test fluid)	~ 20% (in weight) vs. that of an unmodified PP control
Transmittance (ASTM D1003*)	≥ 85%
Optical Haze (ASTM D1003*)	≤ 60%
Processing Temperature Range	210°C–250 °C

\* Measurements based on 0.8 mm thick flat chips molded of Cesa Non-PFAS Low Retention G1-BP compounds

## LOW RETENTION PERFORMANCE FOR PIPETTE TIPS (Green/Blue Dye Water Test)

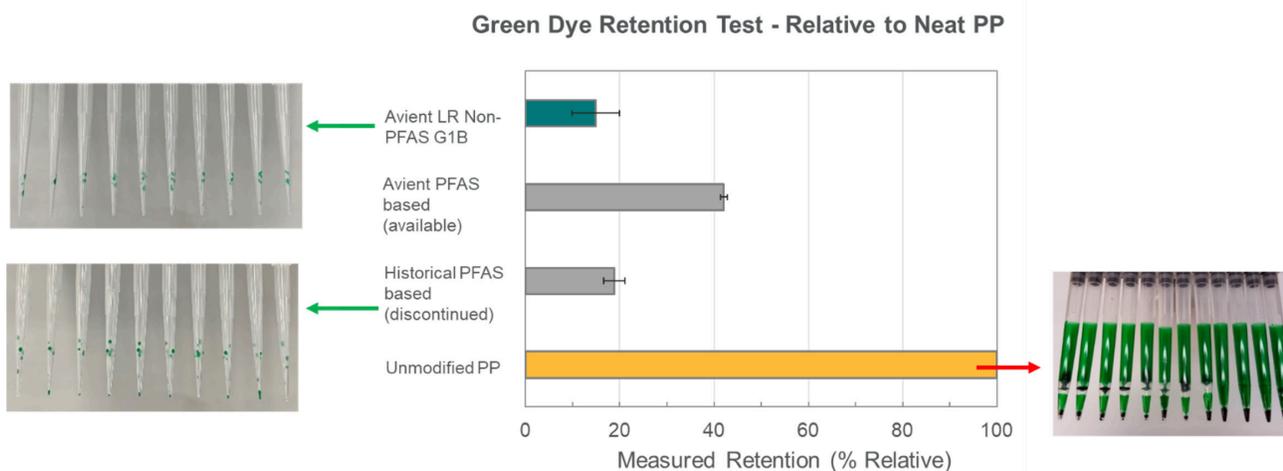

## TARGET APPLICATIONS

Cesa Non-PFAS Low Retention Additives are available as ready-to-use compounds or as additive masterbatches and can be used for:

- Pipette tips and labware requiring low retention, low extractables, and optical clarity
- Single-use catheters or tubing, disposable diagnostic devices, and fluid handling components
- Medical gowns, drapes, and nonwovens needing durable water repellency
- Other products seeking non-PFAS labeling and hydrophobicity

1.844.4AVIENT  
www.avient.com



Copyright © 2026, Avient Corporation. Avient makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as “typical” or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. Avient makes no warranties or guarantees respecting suitability of either Avient’s products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. AVIENT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.